
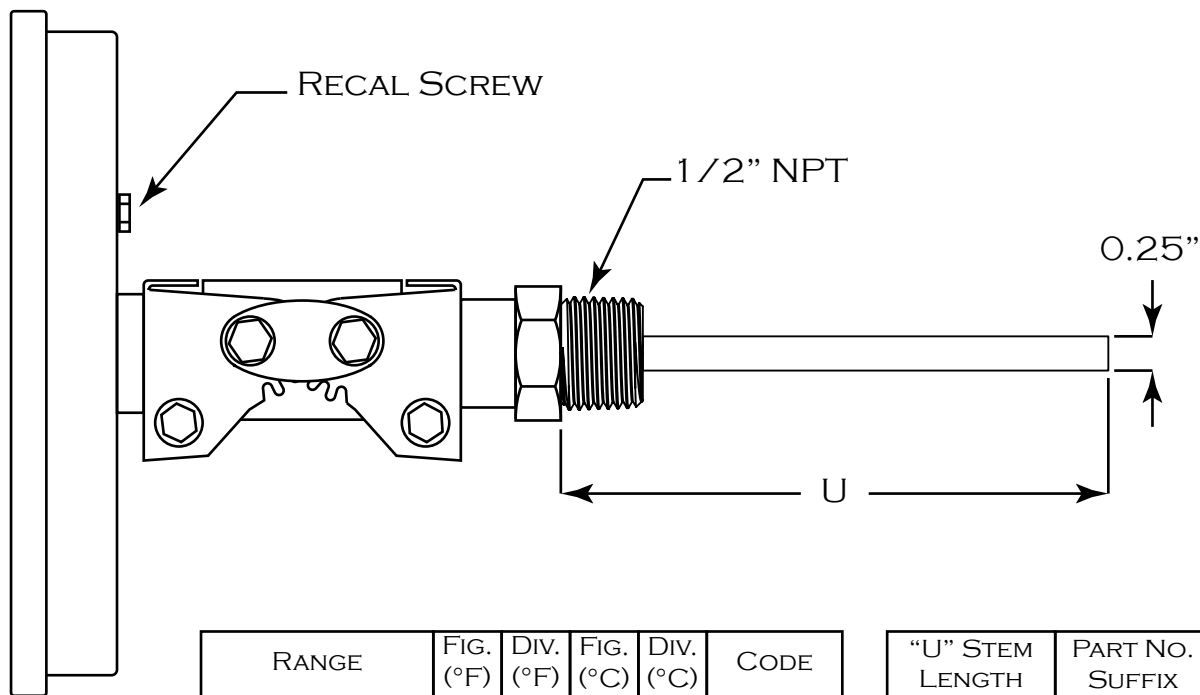


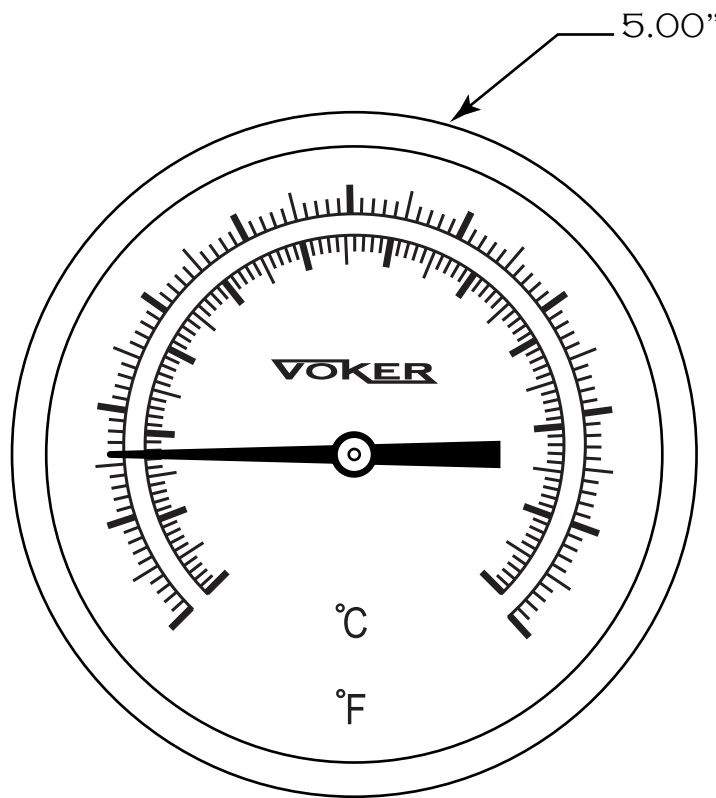

SPECIFICATIONS:

DIAL: WHITE FINISHED ALUMINUM WITH BLACK MARKINGS
 STEM: 300 SERIES STAINLESS STEEL, SILICONE DAMPENED COIL/V
 CONNECTION: 1/2" NPT, 300 SERIES STAINLESS STEEL
 ADJUSTABLE LINKAGE: 300 SERIES STAINLESS STEEL
 CASE & RING: 300 SERIES STAINLESS STEEL (HERMETICALLY SEALED)
 LENS: GLASS
 POINTER: BLACK
 RECALIBRATOR: LOCATED ON REAR OF CASE
 CONFORMS WITH ASME B40.200
 ACCURACY: $\pm 1\%$ FULL RANGE (ASME B40.3 GRADE A)
 AMBIENT TEMP: -40 TO 250°F (-40 TO 120°C)

PROJECT DETAILS:

PROJECT NAME: _____

CUSTOMER: _____

ENGINEER: _____

PURCHASE ORDER: _____

RANGE	FIG. (°F)	DIV. (°F)	FIG. (°C)	DIV. (°C)	CODE
-40 - 160°F&C	20	2	10	1	40160
25 - 125°F&C					25125
0 - 250°F&C	20	2	10	1	0250
50 - 300°F&C					50300
50 - 500°F&C					50500
150 - 750°F&C					150750
200 - 1000°F&C					2001000

"U" STEM LENGTH	PART NO. SUFFIX
2.5"	-2.5
4"	-4
6"	-6
9"	-9
12"	-12
*CUSTOM STEM LENGTHS AVAILABLE, CONSULT FACTORY	

VOKER

DATE:	10/16/24	APPROVED BY:	MRA	DRAWN BY:	MRA
PART DESCRIPTION:					
5" DIAL BIMETAL THERMOMETER (ADJ. ANGLE STEM)					
SCALE:	NONE	PART #:	B50SGA SERIES	DRAWING NUMBER:	XXXX
DIMENSIONS: Inches [Metric] Inches: .xx +/- .010 .xxx +/- .005 [Metric]: xx +/- .25 .xxx +/- .13					
REV.#	DATE	CHANGE	REV.#	DATE	CHANGE