



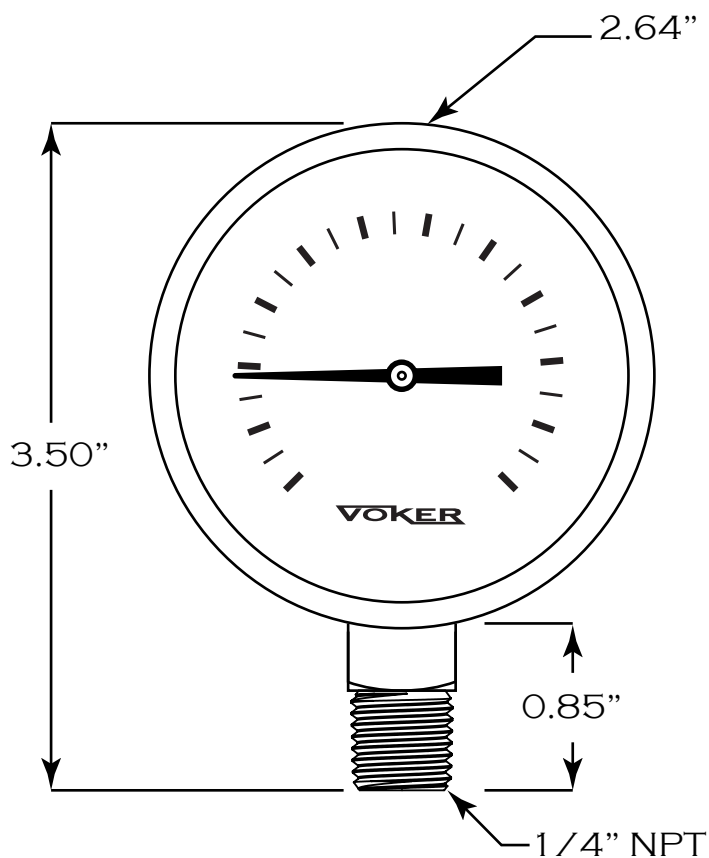

SPECIFICATIONS:

DIAL SIZE: 2.5"
 CASE: BLACK-PAINTED CARBON STEEL
 DIAL: WHITE-FINISHED ALUMINUM WITH BLACK MARKINGS
 LENS: PLASTIC (THREADED)
 POINTER: BLACK (NON-ADJUSTABLE)
 MOUNT: LOWER OR CENTER-BACK
 DIAPHRAGM: BERYLLIUM COPPER
 WETTED PARTS: BRASS
 MOVEMENT: BRASS WITH PRECISION-MILLED TEETH
 ACCURACY: $\pm 1.5\%$ (SURPASES ASME B40.100 GRADE B)
 $\pm 3-1-3\%$ (RANGES BELOW 30" H2O)
 CONNECTION SIZE: 1/4" NPT
 ANSI STANDARD: B40.100
 AMBIENT TEMP: -40 TO 140°F (-40 TO 60°C)
 PROCESS TEMP: -40 TO 160°F (-40 TO 70°C)

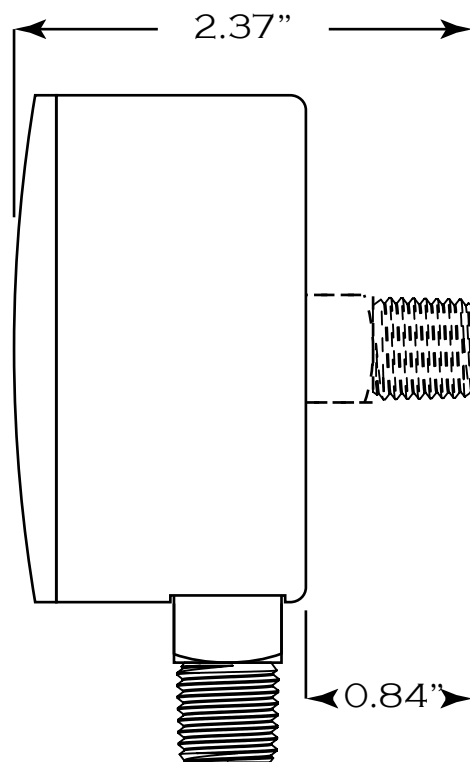

CODE (OZ/IN ²)	CODE (H2O)	RANGE	FIG.	DIV.
721	720	15 - 0 VAC.	3	0.5
731	730	30 - 0 VAC.	5	1
761	760	60 - 0 VAC.	10	2
771	770	100 - 0 VAC.	20	2
781	780	160 - 0 VAC.	40	5
811	810	0 - 10	1	0.2
821	820	0 - 15	3	0.5
831	830	0 - 30	5	1
841	840	0 - 35	5	1
861	860	0 - 60	10	2
871	870	0 - 100	20	2
881	880	0 - 160	40	5
891	890	0 - 200	40	5
301	303	30 - 0 - 30	10	1
903		0 - 3 PSI	0.5	0.1
905		0 - 5 PSI	1	0.1
910		0 - 10 PSI	2	0.2
575		0-35"H2O / 0-20 oz/IN ²	5/4	1/0.5

PROJECT DETAILS:

PROJECT NAME: _____

CUSTOMER: _____

ENGINEER: _____

PURCHASE ORDER: _____

VOKER

DATE:	11/20/24	APPROVED BY:	MRA	DRAWN BY:	MRA
PART DESCRIPTION:					
2.5" LOW PRESSURE GAUGE					
SCALE:	NONE	PART #:	DG25C SERIES	DRAWING NUMBER:	XXXX
DIMENSIONS: Inches [Metric]					
Inches: .xx +/- .010 .xxx +/- .005 [Metric]: xx +/- .25 .xxx +/- .13					
REV.#	DATE	CHANGE	REV.#	DATE	CHANGE