


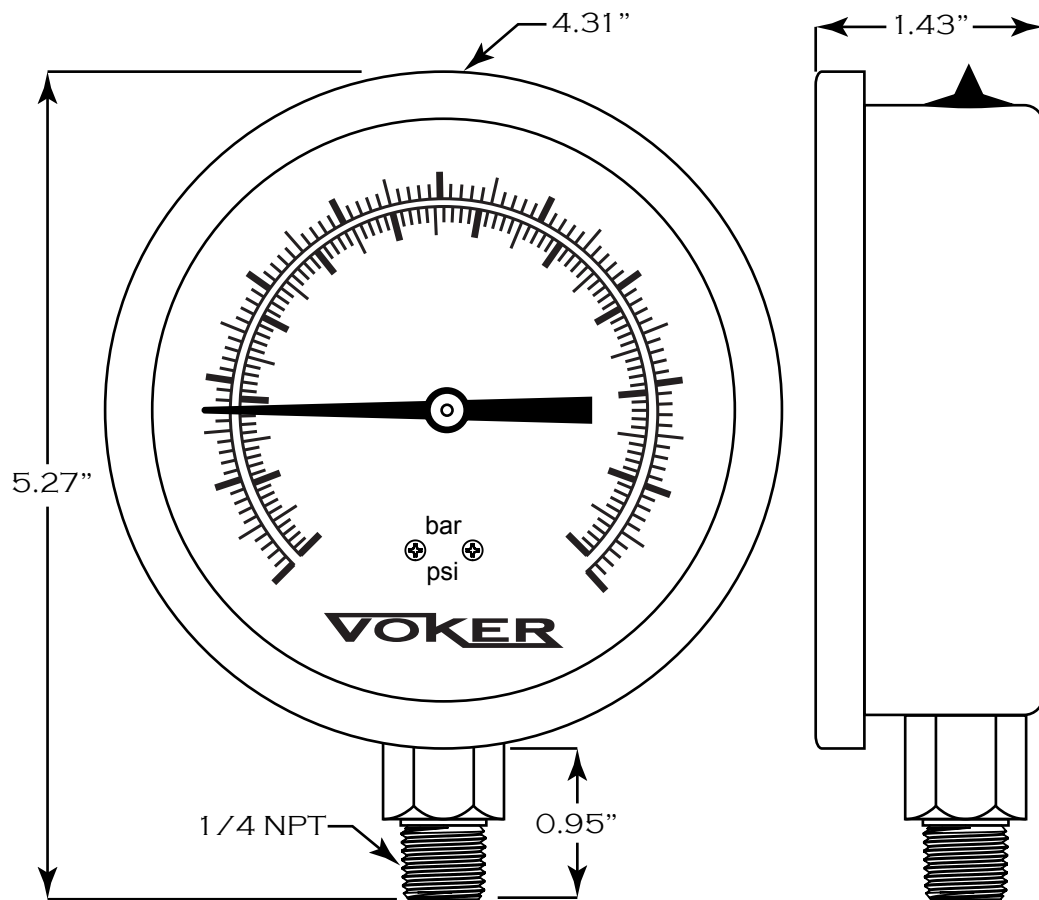

SPECIFICATIONS:

DIAL SIZE: 4"
 CASE & RING: 304 STAINLESS STEEL WITH CRIMPED RING
 DIAL: WHITE-FINISHED ALUMINUM WITH BLACK MARKINGS
 LENS: POLYCARBONATE
 POINTER: BLACK (NON-ADJUSTABLE)
 MOUNT: LOWER OR CENTER-BACK
 WETTED PARTS: BRASS
 MOVEMENT: BRASS
 ACCURACY: $\pm 3-2-3\%$ (ASME B40.100 GRADE B)
 CONNECTION SIZE: 1/4" NPT
 ANSI STANDARD: B40.100
 AMBIENT TEMP: 0 TO 140°F (-18 TO 60°C)
 PROCESS TEMP: 0 TO 140°F (-18 TO 60°C)

CODE	RANGE	PSI		BAR	
		FIG.	DIV.	FIG.	DIV.
VAC	30"Hg - 0 VACUUM	5	1	0.2	0.02
V15	30"Hg - 0 - 15 PSI & BAR	5	0.5	0.5	0.05
V30	30"Hg - 0 - 30 PSI & BAR	10	1	0.5	0.1
V60	30"Hg - 0 - 60 PSI & BAR	10	2	1	0.1
V100	30"Hg - 0 - 100 PSI & BAR	20	2	1	0.2
V150	30"Hg - 0 - 150 PSI & BAR	25	5	2	0.2
V300	30"Hg - 0 - 300 PSI & BAR	50	10	20	0.5
015	0 - 15 PSI & BAR	3	0.5	0.2	0.04
030	0 - 30 PSI & BAR	5	1	0.5	0.1
060	0 - 60 PSI & BAR	10	2	1	0.2
100	0 - 100 PSI & BAR	20	2	1	0.2
160	0 - 160 PSI & BAR	40	5	2	0.5
200	0 - 200 PSI & BAR	50	5	2	0.5
300	0 - 300 PSI & BAR	50	10	5	1
400	0 - 400 PSI & BAR	100	10	5	1
600	0 - 600 PSI & BAR	100	20	10	2
1000	0 - 1000 PSI & BAR	200	20	10	2
1500	0 - 1500 PSI & BAR	300	50	20	5
2000	0 - 2000 PSI & BAR	500	50	20	5
3000	0 - 3000 PSI & BAR	500	100	50	10
5000	0 - 5000 PSI & BAR	1000	200	50	10

PROJECT DETAILS:

PROJECT NAME: _____

CUSTOMER: _____

ENGINEER: _____

PURCHASE ORDER: _____

VOKER

DATE:	1/15/25	APPROVED BY:	MRA	DRAWN BY:	MRA
PART DESCRIPTION:					
G40LSP SERIES LIQUID-FILLED GAUGE					
SCALE:	NONE	PART #:	G40LSP SERIES	DRAWING NUMBER:	XXXX
DIMENSIONS: Inches [Metric] Inches: .xx +/- .010 .xxx +/- .005 [Metric]: xx +/- .25 .xxx +/- .13					
REV.#	DATE	CHANGE	REV.#	DATE	CHANGE