

G_CP SERIES UTILITY GAUGE

DESCRIPTION


INDUSTRY STANDARD UTILITY GAUGES ARE WELL-ROUND-ED INSTRUMENTS FOR A VARIETY OF APPLICATIONS. VOKER'S UTILITY GAUGE SERIES IS A GREAT CHOICE FOR GENRAL PURPOSE USE. ***ALWAYS INSTALL WITH A COIL SYPHON ON STEAM APPLICATIONS**

SPECIFICATIONS

DIAL SIZE: 1.5", 2", 2.5", 3.5"
CASE & RING: BLACK-PAINTED CARBON STEEL WITH CRIMPED RING
DIAL: WHITE-FINISHED ALUMINUM WITH BLACK MARKINGS
LENS: PLASTIC
POINTER: BLACK (NON-ADJUSTABLE)
MOUNT: LOWER OR CENTER-BACK
WETTED PARTS: BRASS
MOVEMENT: BRASS
ACCURACY: ±3-2-3% GRADE B
CONNECTION SIZE: 1/8" NPT, 1/4" NPT
ANSI STANDARD: B40.1
AMBIENT TEMP: -40 TO 140°F (-40 TO 60°C)
PROCESS TEMP: -40 TO 150°F (-40 TO 65°C)

PART NUMBER MATRIX

G 25 C P L 100 B -25

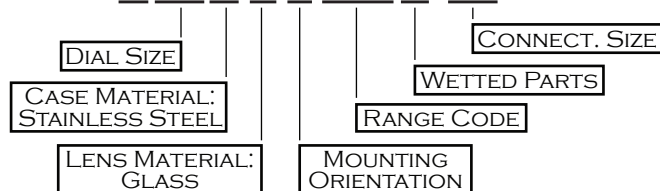


RANGE TABLE

CODE	RANGE	PSI		BAR	
		FIG.	DIV.	FIG.	DIV.
VAC	30"Hg - 0 VACUUM	5	1	0.2	0.02
V15	30"Hg - 0 - 15 PSI & BAR	5	0.5	0.5	0.05
V30	30"Hg - 0 - 30 PSI & BAR	10	1	0.5	0.1
V60	30"Hg - 0 - 60 PSI & BAR	10	2	1	0.1
V100	30"Hg - 0 - 100 PSI & BAR	20	2	1	0.2
V150	30"Hg - 0 - 150 PSI & BAR	25	5	2	0.2
V300	30"Hg - 0 - 300 PSI & BAR	50	10	20	0.5
015	0 - 15 PSI & BAR	3	0.5	0.2	0.05
030	0 - 30 PSI & BAR	5	1	0.5	0.1
060	0 - 60 PSI & BAR	10	2	1	0.2
100	0 - 100 PSI & BAR	20	2	1	0.2
160	0 - 160 PSI & BAR	40	5	2	0.5
200	0 - 200 PSI & BAR	50	5	2	0.5
300	0 - 300 PSI & BAR	50	10	5	1
400	0 - 400 PSI & BAR	100	10	4	1
600	0 - 600 PSI & BAR	100	20	10	1
1000	0 - 1000 PSI & BAR	200	20	10	2
1500	0 - 1500 PSI & BAR	300	20	20	5
2000	0 - 2000 PSI & BAR	500	50	20	5
3000	0 - 3000 PSI & BAR	500	100	50	5
5000	0 - 5000 PSI & BAR	1000	100	50	10

OPTIONS

- CERTIFICATE OF CALIBRATION
- CLEANED FOR OXYGEN SERVICE

DIMENSIONS

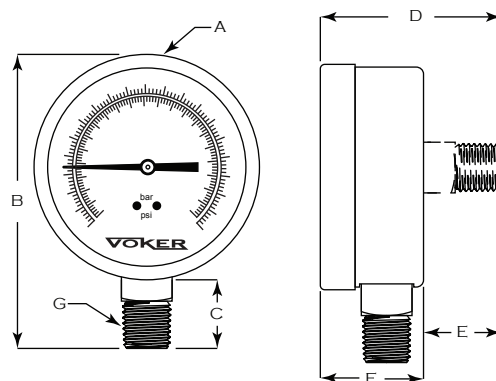

PART	DIMENSIONS						
	A	B	C	D	E	F	G
G15CPL	1.67"	2.25"	2.25"			0.95"	1/8 NPT
G15CPB	1.67"	1.67"		1.53"	0.59"	0.95"	1/8 NPT
G20CPL	2.06"	2.82"	0.73"			1.14"	1/4 NPT
G20CPB	2.06"	2.06"		1.88"	0.72"	1.16"	1/4 NPT
G25CPL	2.49"	3.26"	0.76"			1.14"	1/4 NPT
G25CPB	2.49"	2.49"		1.97"	0.72"	1.15"	1/4 NPT
G35CPL	3.47"	4.39"	0.93"			1.16"	1/4 NPT