
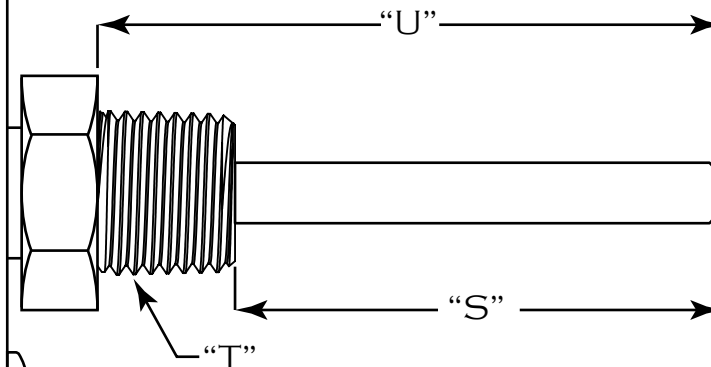


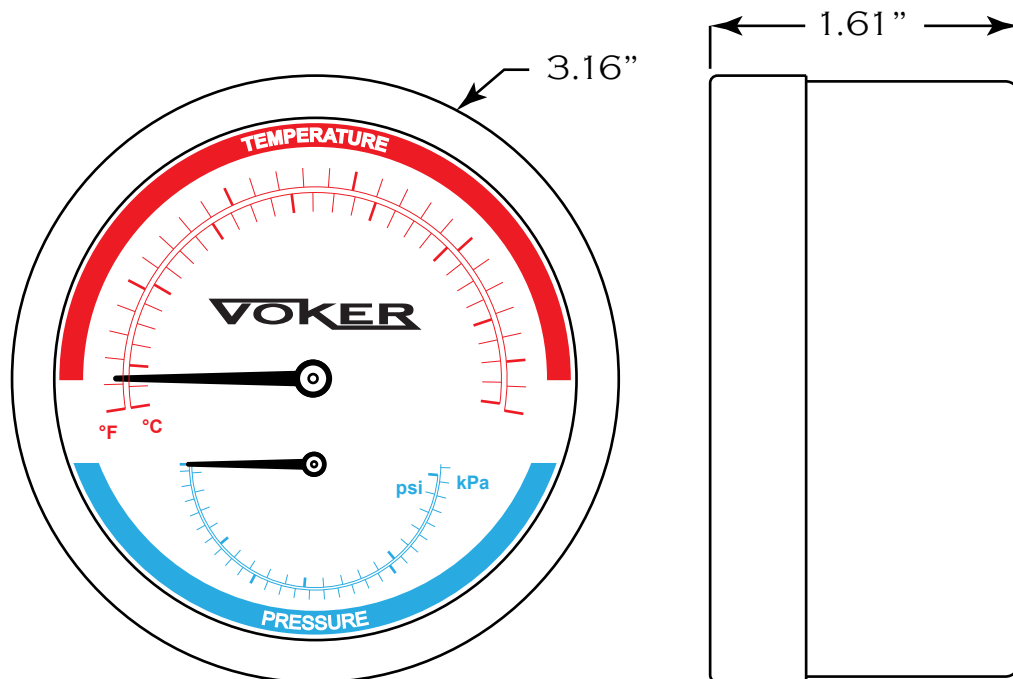

SPECIFICATIONS:

DIAL SIZE: 3"

CASE & RING: BLACK-PAINTED STEEL WITH CRIMPED RING

DIAL: WHITE-FINISHED ALUMINUM WITH BLUE, RED & BLACK MARKINGS

LENS: GLASS

POINTER: BLACK (NON-ADJUSTABLE)

MOUNT: CENTER-BACK

WETTED PARTS: BRASS

MOVEMENT: BRASS

ACCURACY (PRESSURE): $\pm 3-2-3\%$ (GRADE B)

ACCURACY (TEMP): ± 1 SCALE DIVISION

CONNECTION SIZE: SEE TABLE

AMBIENT TEMP: -40 TO 250°F (-40 TO 120°C)

***NOT COMPATIBLE TO STEAM APPLICATIONS**

CODE	RANGE	PSI		kPA		F°		C°	
		FIG.	DIV.	FIG.	DIV.	FIG.	DIV.	FIG.	DIV.
060	0 - 60 PSI & kPA	10	2	100	20	50	10	20	5
075	0 - 75 PSI & kPA	15	2.5	100	20				
100	0 - 100 PSI & kPA	25	5	250	25				
200	0 - 200 PSI & kPA	50	10	500	50				

CODE	CONNECTION SIZE (T)	STEM LENGTH (S)	U-LENGTH
1-25	1/4" NPT	1"	1.32"
25-25X	1/4" NPT w/ EXTENSION	1"	1.32"
25-25	1/4" NPT	2.98"	3.25"
25-50	1/2" NPT	2.54"	3.25"

VOKER

DATE:	03.13.25	APPROVED BY:	MRA	DRAWN BY:	MRA
PART DESCRIPTION:					
3" TRIDICATOR (BACK MOUNT)					
SCALE:	NONE	PART NUMBER:	T30CG SERIES	DRAWING NUMBER:	XXXX
DIMENSIONS: Inches [Metric]					
Inches: .xx +/- .010 .xxx +/- .005 [Metric]: xx +/- .25 .xxx +/- .13					
REV.#	DATE	CHANGE	REV.#	DATE	CHANGE