


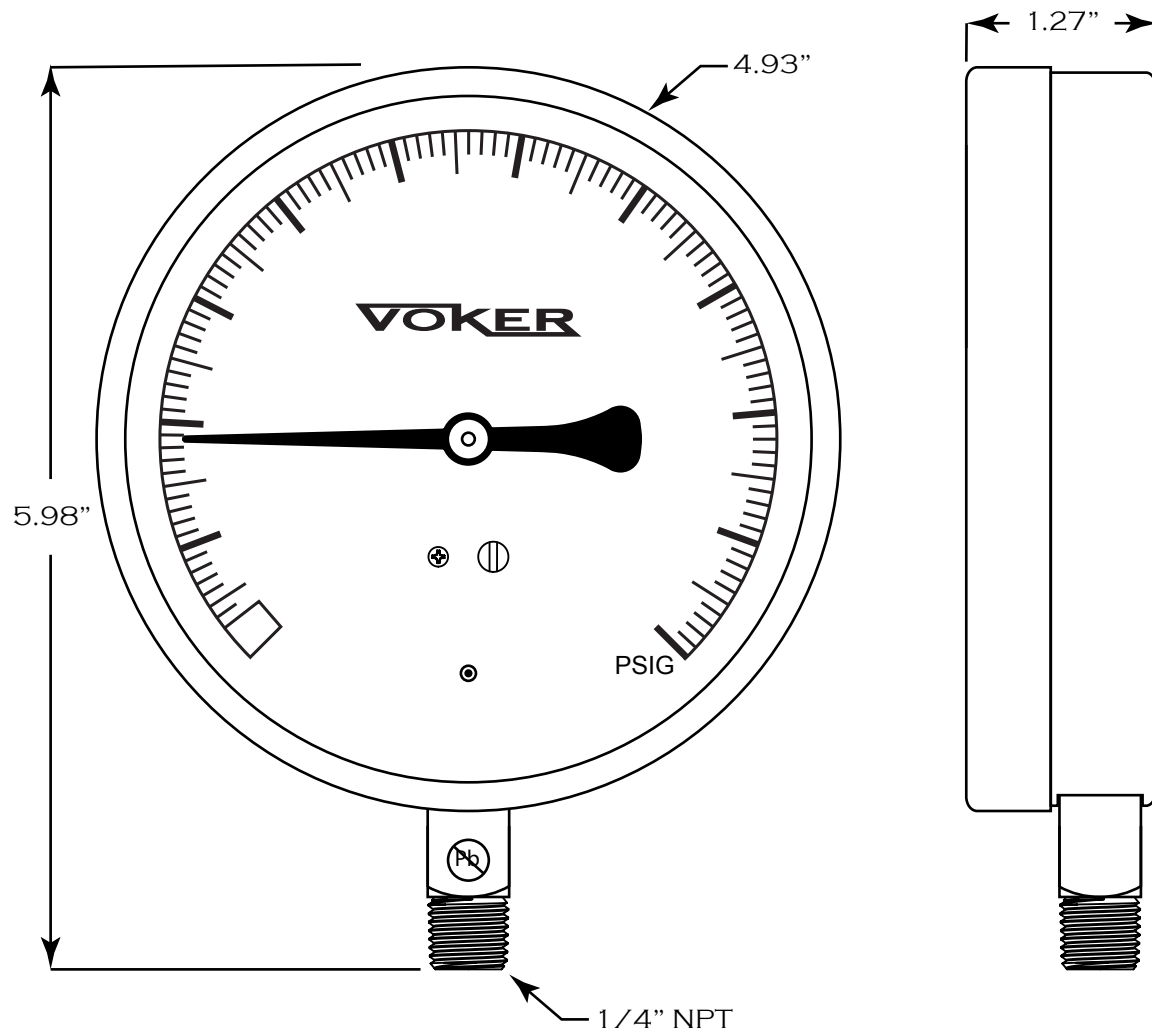

SPECIFICATIONS:

DIAL SIZE: 4.5"
 CASE & RING: 304 STAINLESS STEEL WITH REMOVABLE RING
 DIAL: WHITE-FINISHED ALUMINUM WITH BLACK MARKINGS
 LENS: ACRYLIC
 POINTER: BLACK (FIELD ADJUSTABLE)
 MOUNT: LOWER
 WETTED PARTS: LEAD-FREE BRASS
 MOVEMENT: BRASS
 ACCURACY: $\pm 1\%$ (ASME B40.100 GRADE A)
 CONNECTION SIZE: 1/4" NPT
 ANSI STANDARD: B40.100
 AMBIENT TEMP: -40 TO 158°F (-40 TO 70°C)
 PROCESS TEMP: -40 TO 158°F (-40 TO 70°C)

CODE	RANGE	PSI	
		FIG.	DIV.
VAC	30"Hg - 0 VACUUM	5	0.5
V15	30"Hg - 0 - 15 PSI	10/5	1/0.5
V30	30"Hg - 0 - 30 PSI	10/5	1/0.5
V60	30"Hg - 0 - 60 PSI	10/10	2/1
V100	30"Hg - 0 - 100 PSI	30/20	2/2
V150	30"Hg - 0 - 150 PSI	30/20	5/2
V300	30"Hg - 0 - 300 PSI	30/50	5/2
015	0 - 15 PSI	3	0.2
030	0 - 30 PSI	5	0.5
060	0 - 60 PSI	10	1
100	0 - 100 PSI	10	1
160	0 - 160 PSI	20	2
200	0 - 200 PSI	20	2
300	0 - 300 PSI	50	5
400	0 - 400 PSI	50	5
600	0 - 600 PSI	50	10
1000	0 - 1000 PSI	100	20

PROJECT DETAILS:

PROJECT NAME: _____

CUSTOMER: _____

ENGINEER: _____

PURCHASE ORDER: _____

VOKER

DATE:	09/11/25	APPROVED BY:	MRA	DRAWN BY:	MRA
PART DESCRIPTION:					
G45SPL_BLF CONTRACTOR'S GAUGE (LEAD-FREE)					
SCALE:	NONE	PART #:	G45SPL_BLF SERIES	DRAWING NUMBER:	XXXX
DIMENSIONS: Inches [Metric] Inches: .xx +/- .010 .xxx +/- .005 [Metric]: xx +/- .25 .xxx +/- .13					
REV.#	DATE	CHANGE	REV.#	DATE	CHANGE