

## G45SP SERIES CONTRACTOR'S GAUGE

## DESCRIPTION

DESIGNED FOR PROFESSIONALS WHO DEMAND HIGH PERFORMANCE IN RUGGED ENVIRONMENTS, THIS GAUGE COMBINES PRECISION ENGINEERING WITH DURABLE CONSTRUCTION TO MEET THE NEEDS OF EVEN THE TOUGHEST JOBS. THE 4.5" CONTRACTOR'S PRESSURE GAUGE OFFERS THE DURABILITY, ACCURACY, AND DEPENDABILITY YOU NEED TO GET THE JOB DONE RIGHT. \***ALWAYS INSTALL WITH A COIL SYPHON ON STEAM APPLICATIONS**

## SPECIFICATIONS


**DIAL SIZE:** 4.5"  
**CASE & RING:** 304 SS W/ REMOVABLE RING  
**DIAL:** WHITE-FINISHED ALUMINUM WITH BLACK MARKINGS  
**LENS:** ACRYLIC  
**POINTER:** BLACK (FIELD ADJUSTABLE)  
**MOUNT:** LOWER  
**WETTED PARTS:** LEAD-FREE BRASS  
**MOVEMENT:** BRASS  
**ACCURACY:**  $\pm 1\%$  GRADE A  
**CONNECTION SIZE:** 1/4" NPT  
**ANSI STANDARD:** B40.1  
**AMBIENT TEMP:** -40 TO 158°F (-40 TO 70°C)  
**PROCESS TEMP:** -40 TO 158°F (-40 TO 70°C)

## OPTIONS

- CERTIFICATE OF CALIBRATION
- CLEANED FOR OXYGEN SERVICE

## PART NUMBER MATRIX

G 45 S P L 100 BLF - 25

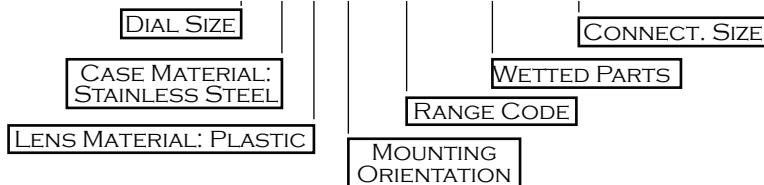

## RANGE TABLE

CODE	RANGE	PSI	
		FIG.	DIV.
VAC	30"HG - 0 VACUUM	5	0.5
V15	30"HG - 0 - 15 PSI	10/5	1/0.5
V30	30"HG - 0 - 30 PSI	10/5	1/0.5
V60	30"HG - 0 - 60 PSI	10/10	2/1
V100	30"HG - 0 - 100 PSI	30/20	2/2
V150	30"HG - 0 - 150 PSI	30/20	5/2
V300	30"HG - 0 - 300 PSI	30/50	5/2
015	0 - 15 PSI	3	0.2
030	0 - 30 PSI	5	0.5
060	0 - 60 PSI	10	1
100	0 - 100 PSI	10	1
160	0 - 160 PSI	20	2
200	0 - 200 PSI	20	2
300	0 - 300 PSI	50	5
400	0 - 400 PSI	50	5
600	0 - 600 PSI	100	10
1000	0 - 1000 PSI	100	20

\*ALWAYS INSTALL WITH A COIL SYPHON ON STEAM APPLICATIONS

\*GAUGE ACCESSORIES ON PAGE \_

## DIMENSIONS

